

Calix E7-2 Ethernet Service Access Platform

PRODUCT OVERVIEW

The Calix E7 Ethernet Service Access Platform integrates IP service delivery and Ethernet transport into a compact, high availability, carrier-class modular chassis that delivers high-performance, scalable network solutions for service providers. The 1RU E7-2 platform delivers VDSL2, Gigabit Passive Optical Network (GPON) and point-to-point Gigabit Ethernet (GE) services with redundant 10-Gigabit Ethernet (10GE) transport and aggregation within a single integrated 2-slot chassis. The E7 enables service providers to deliver differentiated triple play services, advanced business services, and mobile backhaul from a single converged network that revolutionizes the economics of networking by enabling new services and market expansion with a flexible, scalable, pay-as-you-grow architecture.



E7 PRODUCT DESCRIPTION

ETHERNET SERVICE ACCESS PLATFORM:

Residential and business services are converging as more subscribers work from home offices, and internet “over the top” video services consume an increasing percentage of both enterprise and service provider network capacity. IP and Ethernet are the dominant network and transport protocols, and all services – voice, data, and video – are rapidly migrating to a packet-based architecture. High performance applications demand high performance solutions; the Calix E7-2 Ethernet Service Access Platform meets the demanding requirements of Ethernet services access networks.

The Calix E7 delivers a wide array of high performance applications, including 10GE Ethernet transport, delivery of high density residential triple play services over copper pairs (VDSL2/ADSL2+), GPON and point-to-point Ethernet, Metro Ethernet Forum (MEF) compliant business services, mobile backhaul, and protected GE aggregation of Calix E7, C7, B6 and E5 platforms.

HIGH DENSITY SUBSCRIBER ACCESS: With two cards per system, the E7-2 provides flexible, high density subscriber access options in a 1RU shelf:

- 96 VDSL2/ADSL2+ & POTS Combo (48 Overlay)
- 8 GPON and 16 GE ports (528 ONTs)
- 48 point-to-point GE ports (48 ONTs)

With Multi-dwelling unit (MDU) ONTs, the subscribers per 1RU system can exceed several thousand.

MODULAR CHASSIS ARCHITECTURE:


The Calix E7-2 modular chassis enables a pay-as-you-grow architecture, combining the most advantageous attributes of a small form factor product with a large chassis-based system.

- 1RU design can expand from a single slot, for very low first install cost, to multiple chassis, to add subscriber growth yielding a near linear cost curve
- Twenty line cards are managed as a single chassis for operational efficiency
- Mix and match line cards in a common chassis – no common control equipment required
- Line cards can be added or replaced without uninstalling/installing power, alarms, or cables – reducing MTR from hours to minutes
- Subscribers are easily aggregated and network resources efficiently shared across protected trunk facilities
- Hardened 1RU system delivers GPON and Ethernet with 10GE transport from CO, cabinet or pole mount
- Resilient, hot-swappable line cards and fan tray

With the E7-2, service providers no longer need to decide between a single service product and a high growth chassis solution. E7-2 provides low first install cost, operational efficiency and near linear incremental cost per subscriber, enabling Calix customers to maximize their business return.

Calix E7-2 Ethernet Service Access Platform

ARCHITECTURE AND KEY ATTRIBUTES

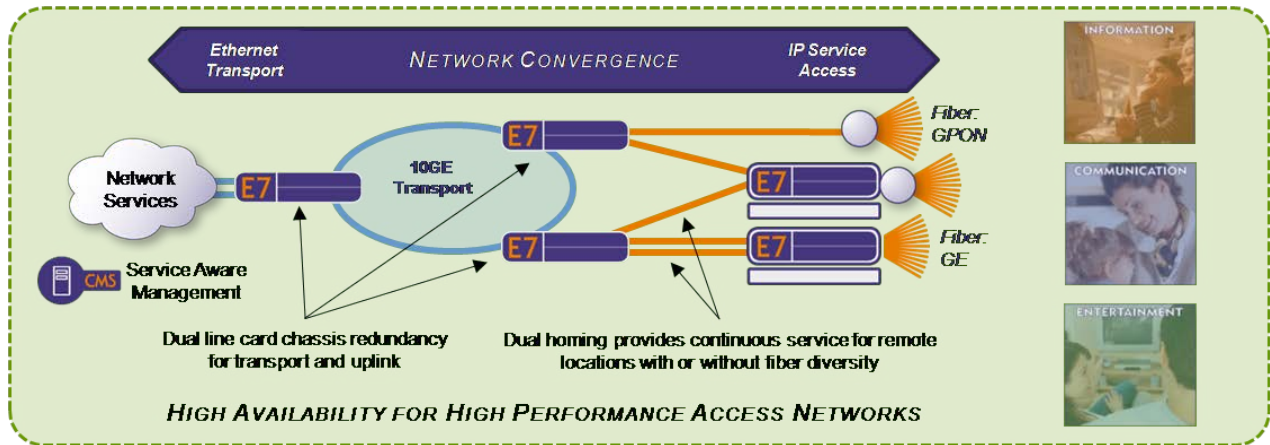

FULL SPECTRUM OF SERVICES: The E7 delivers a full spectrum of access services over GPON and Point-to-Point Ethernet using the family of Calix 700 ONTs, including Single Family Unit (SFU), Small Business Unit (SBU), Multi-Dwelling Unit (MDU), and rack-mount models.

- IPTV – broadcast and Video on Demand (VoD)
- MEF compliant business services
- High-Speed Internet (HSI) access
- Voice – Native SIP/VoIP and TDM Gateway support
- T1 services
- CATV video: RF video overlay with RF return

Calix 700GX ONTs support auto sensing GPON and GE network interfaces, allowing service providers to manage service changes without subscriber onsite technical support.

DELIVERING "QUALITY OF EXPERIENCE": The E7 provides per-subscriber and per-service hierarchical QoS to deliver uncompromised triple play and business services. A powerful collection of classification, policing, queuing and scheduling algorithms let operators manage per-subscriber and per-service traffic flows to maintain priority/delay/loss service differentiation within the E7 network.

SCALABLE IPTV SUPPORT: IPTV services are by far the most demanding in terms of quality, and user expectations are very high. The E7 supports industry standard IGMP snooping to identify and replicate multicast video sent between the set-top box and the video distribution network, providing efficient, scalable, high-quality IPTV distribution on both GPON and Ethernet interfaces

INTEGRATED HIGH-CAPACITY AGGREGATION:

The E7 is built on a core Layer 2 and Layer 3 switch capable of full-duplex, line rate forwarding at all frame sizes and traffic types across all interfaces. This capacity makes the E7 ideal for aggregation and transport of IP/Ethernet services across the access network. The E7 platform supports industry standard pluggable modules for all service and network interfaces, including ITU G.984 compliant GPON, Small Form-Factor Pluggable (SFP) Gigabit Ethernet, XFP 10GE ports, and SFP+ 10GE ports.

NETWORK RESILIENCY:

The Calix E7 supports a flexible set of standards-based network topology protocols for use in aggregation, ring-based transport, and uplink applications.

- ITU G.8032 Ethernet Ring Protection Switching (ERPS)
- IEEE 802.1w Rapid Spanning Tree Protocol (RSTP)
- IEEE 802.3ad/802.1AX Link Aggregation

SERVICE AWARE MANAGEMENT:

The E7, along with the Calix Management System (CMS), allows operators to manage services while understanding their relationship to the network infrastructure. Service-oriented management includes rapid service provisioning, service templates and policies, and service assurance. Comprehensive network management tools let operators create physical and logical topology maps, engineer traffic flows, and manage network commissioning and software upgrades. Network inventory, alarm surveillance and PM collection are enabled by the E7 system. The E7 provides locally hosted Web GUI, CLI, and SNMP interfaces.

SPECIFICATIONS

Calix E7-2 Ethernet Service Access Platform

BACKPLANE BANDWIDTH

100 Gbps between slots

SLOTS

2 universal line card slots
1 Fan Tray slot

DIMENSIONS (W x H x D)

17.5 x 1.7 x 11.45 inches
44.5 x 4.3 x 29.1 cm
Height is 1 RU

WEIGHT

5.9 lb (2.7 kg) E7 shelf
7.4 lb (3.4 kg) shelf with Fan Tray

OPERATING ENVIRONMENT

Temperature: -40 to +65° C
(-40° F to +149° F)
Humidity: 10 to 95%
(non-condensing)
Operating altitude: 10,000 ft
(3,049 m)

STORAGE ENVIRONMENT

Temperature: -40 to +85° C
(-40° F to +185° F)
Humidity: 5 to 95%

MANAGEMENT SUPPORT

Calix CMS network management
Calix CLI and Web GUI for local
management interface
SNMP v2c and v3 performance and
fault monitoring

MANAGEMENT INTERFACES

Ethernet 10/100 (RJ-45 connector on
Calix E7-2 Fan Tray)
Ethernet 10/100 (RJ-45 connector on
back of Calix E7-2)
RS-232 (RJ-11 connector on Calix
E7-2 Fan Tray)

SYNCHRONIZATION

Synchronization is enabled by the E7-
2 line cards as required
External reference timing
Built-in Stratum-3 clock
Hardware-ready to support
Synchronous Ethernet

ALARM I/O INTERFACES

Wire wrap pin access on E7 back
User definable alarm
inputs: 7; outputs: 1

FIBER INTERFACES

All optical ports use pluggable optics
(SFP, XFP, SFP+)
LC or SC connectors on modules

ANALOG/METALLIC INTERFACES

Two standard 25-pair RJ-21
connectors per slot

TIMING I/O INTERFACES

Access through wire wrap pins on the
back of the Calix E7
BITS clock (sink and source)

STANDARDS COMPLIANCE

NEBS Level 3 compliance
(GR-63-CORE, GR-1089-CORE,
GR-3028)
UL 60950
FCC Part 15 Class A

POWER FEEDS

Integrated power management on
Calix E7-2 line cards
Redundant -48/60 VDC battery
feeds (A and B)
Input Range: -42.5VDC to -72VDC
Fuse: 7.5 Amps (A and B)



SPECIFICATIONS

Calix E7 Ethernet Service Access Platform

FAN TRAY ASSEMBLY - 2 (100-03590)

FANS

4 fans housed in fan tray
Resilient design maintains system cooling with one fan failure
Variable speed operation depending on operating temperature*

MANAGEMENT INTERFACES

Ethernet 10/100 (RJ-45 connector)
RS-232 (RJ-11 connector)

SYSTEM INFORMATION

7-segment LCD display
System Controller (MGT) – GREEN

SHELF ALARM INDICATOR

Critical (CR) - RED
Major (MJ) - RED
Minor (MN) - AMBER
Alarm Cut-Off (ACO) button

POWER SPECIFICATIONS

Min Input Power: 8 Watts @-48V
Max Input Power: 48 Watts@ -48V

MAINTENANCE

Field-replaceable air filter
(not used in RT locations)
Hot-swappable fan tray assembly



FAN TRAY ASSEMBLY (100-01451)

FANS

4 fans housed in fan tray
Resilient design maintains system cooling with one fan failure

MANAGEMENT INTERFACES

Ethernet 10/100 (RJ-45 connector)
RS-232 (RJ-11 connector)

SYSTEM INFORMATION

7-segment LCD display
System Controller (MGT) – GREEN

SHELF ALARM INDICATOR

Critical (CR) - RED
Major (MJ) - RED
Minor (MN) - AMBER
Alarm Cut-Off (ACO) button

POWER SPECIFICATIONS

Typical CO Environment
Power: 22 Watts

RT Environment
Power: 65 Watts

MAINTENANCE

Field-replaceable air filter
(not used in RT locations)
Hot-swappable fan tray assembly



ORDERING INFORMATION

CALIX E7-2 ETHERNET SERVICE ACCESS PLATFORM

000-00372..... E7-2 Chassis with Fan Tray Assembly and Installation Kit
100-01451..... E7-2 Fan Tray Assembly
000-00228..... E7-2 Fan Tray Assembly Filter, Package of 10 units
100-03590..... E7-2 Fan Tray Assembly 2 (FTA2)*
000-00760..... E7-2 Fan Tray Assembly 2 (FTA2) Filter, Package of 10 units

* Variable speed operation under software control requires a minimum of E7 Release 2.2 software. In releases prior to 2.2, the FTA2 fan speeds are identical to the original FTA.

CALIX PLUGGABLE TRANSCEIVER MODULES

The E7-2 supports pluggable modules for all service and network interfaces. Refer to the Calix Optical Transceiver Modules Datasheet (#250-00191) for a complete list of modules and specifications.

CSFP Option 2 1GE optical dual-port Compact Small Form-factor Pluggable (CSFP) Option 2 modules
SFP 1GE and 2.5GE optical and copper Small Form-factor Pluggable (SFP) modules
SFP+ 10GE optical Enhanced Small Form-factor Pluggable (SFP+) modules
Direct Attach Multi-rate copper Small Form-factor Pluggable (SFP/SFP+) cables
XFP 10GE optical Small Form-factor Pluggable (XFP) modules
GPON OIM 2.5Gbps GPON (Class B+ ODN with minimum 28dB link budget, up to 1:64 splits)
ER-GPON OIM 2.5Gbps Extended Reach GPON (up to 40 km with 1:8 split)

Notes: For GPON OIM, 10GE XFP, 10GE SFP+ pluggable transceivers, Direct Attach cables, and all transceivers used in CSFP Option 2 sockets, only products purchased directly from Calix are supported. The use of GPON OIM, Active Ethernet CSFPs, 10GE XFP, 10GE SFP+ pluggable transceivers and Direct Attach cables not purchased directly from Calix is not supported and will void all product warranties covering the Calix equipment to which such third-party materials are connected.

- SFP modules may also be used in CSFP Option 2 sockets, and in SFP+ sockets at 1GE rate.
- Copper Direct Attach cables can operate in SFP, CSFP Option 2, and SFP+ sockets at 1GE, 2.5GE, and 10GE data rates as supported by the card type.